

FFK 45°

LUČNI KOMAD 1/8 S PRIRUBNICAMA
 FLANSCHBOGENSTÜCKE 1/8
 DOUBLE FLANGED 1/8 BENDS

Art N°
 715

Standardna površinska zaščita: plastificirano min. 250 mic RAL 5015

Standard beschichtung: Pulverbeschichted min. 250 mic RAL 5015

Standard coating: Fusion bonded epoxy powder min. 250 mic RAL 5015


Prirubnice prema EN 1092-2 ili na zahtjev prema ostalim standardima.
 Einbaufansche nach EN 1092-2 oder auf Anfrage nach andere Standard.
 Flanges according to EN 1092-2 or on request according to other standard.



EN 545



RAL GSK
 GSK-ID: 1238

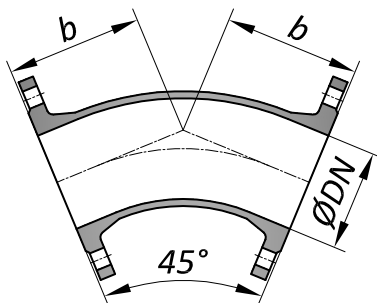

Nazivni promjer Nennweite Nominal size DN	b	Masa Gewicht Weight (kg)	
		PN 10	PN 16
50	150	8	
60	160	8,2	
65	165	8,7	
80	130	9,1	
100	140	11,4	
125	150	14,6	
150	160	18,7	
200	180	27,5	27
250	350	55	54
300	400	78	82
350	298	77	82,5
400	324	96	112
450	350	121	145
500	375	145	180
600	426	212	270
700	478	293	326
800	529	403	448