

# LUČNI KOMAD SA STOPALOM FLANSCHENKRÜMMER DOUBLE FLANGED BENDS

N 90°

Art N°  
714

Standardna površinska zaštita: plastificirano min. 250 mic RAL 5015


Standard beschichtung: Pulverbeschichted min. 250 mic RAL 5015

Standard coating: Fusion bonded epoxy powder min. 250 mic RAL 5015

Prirubnice prema EN 1092-2 ili na zahtjev prema ostalim standardima.

Einbaufansche nach EN 1092-2 oder auf Anfrage nach andere Standard.

Flanges according to EN 1092-2 or on request according to other standard.

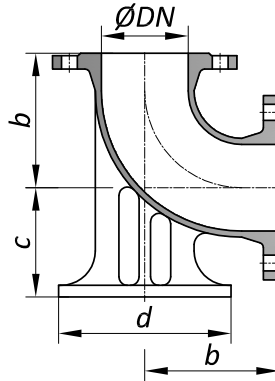

EN 545



RAL GSK  
GSK-ID: 1238



Nazivni promjer Nennweite Nominal size  DN	b	c	d	Masa Gewicht Weight  (kg)	
				PN 10	PN 16
				50	150
65	165	100	165	11,5	
80	165	110	180	13	
100	180	125	200	16,8	
125	200	140	225	22	
150	220	160	250	29,5	
200	260	190	300	46	45,5
250	350	225	350	73,5	72,5
300	400	255	400	104	103
350	450	290	450	137	142
400	500	320	500	178	187
450	550	355	550	235	259
500	600	385	600	286	314
600	700	450	700	432	482